




Air Technologies Inc.

AA088 – DFH OUTDOOR EXHAUST KIT

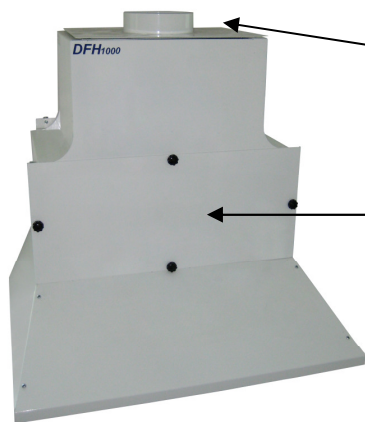

6" diameter Discharge Collar is to be placed on top of unit as in photo

DFH Unit
(arrow pointing to filter access door)

Included in this DFH Odor Exhaust Kit are:

- 1) 6" diameter discharge grille
- 2) Screws to secure grille to DFH unit
- 3) 8 feet of 6" dia discharge hose
- 4) 2 clamps to secure hose to DFH and Outdoor Vent (outdoor vent supplied by others)

Installation


- 1) Remove existing screws from the DFH discharge grille
- 2) Align the 6" diameter Discharge Collar supplied in this kit with the existing grille and secure to the main unit using screws provided
- 3) Secure the 6" diameter hose supplied to the discharge collar above using one of the 2 clamps supplied in this kit
- 4) Connect the other end of the hose to your existing 6" diameter vent to the exterior
WHILE YOU HAVE YOUR VENT OPEN, Please ensure the following:
 - 1) your vent to the exterior is not clogged with lint or debris
 - 2) you have a proper grille to the exterior (these tend to corrode, verify that it is in proper condition, may require replacement)

NOTES:

- 1) If you do not have a vent, or need to make an opening to the exterior, you need to purchase a Vent kit with a 6" diameter tube at your local hardware store, similar to photo shown below. Make sure vent kit is c/w a grille not allowing anything back in)
- 2) Supplied in the kit is 8 feet of discharge hose. Try to not exceed the length of 8 feet from top of unit to outdoor vent. If you exceed this length, you must use smooth pipe to decrease the resistance. The longer the length, the lower you airflow.

Photo of a typical Vent Kit, c/w:

- 6" diameter tube
- outlet in front contains a grille

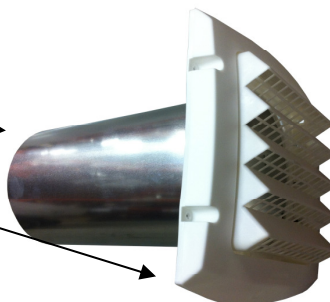

We Make Clean Air